

DSP662

6W Ceiling Speaker with Fire Dome



Description

DSP662 is a ceiling speaker with built-in 70V/100V transformer. The 70V/100V transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.

The built-in 6.5" speaker driver is designed of wide frequency response 80-20,000Hz. It is made of high-class steel and form by stamping, which ensures long-term durability, and will never be out of shape of fading; Spring clip clamp makes the easy and secure installation; Driver surround excellent damping, long life, clear and sonorous sound.

It is an ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

Features

- 70/100V, 1 ~ 6W with multiple terminals
- 6.5" paper cone driver unit
- Max. Sound Pressure Level: 97±2dB
- Effective Freq. Range: 80Hz ~ 20kHz
- High sensitivity: (91±2dB)

Specifications


Model		DSP662
Drive Units		6.5"x 1
Rated Voltage	70V	-
	100V	1W/2W/3W/6W
Sensitivity (1m, 1W)		91±2dB
Max. SPL(1m)		97±2 dB

Frequency Response	80Hz-20kHz
Installation Hole	Φ166~Φ174mm
Weight	1kg

Product Information


FREQ. RESPONSE

(dB SPL、1W、1m)

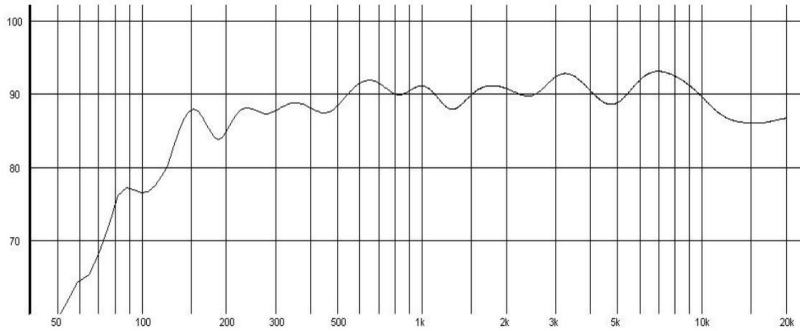


DISTORTION

(THD<1.5% 1W、1m、100Hz-10kHz)

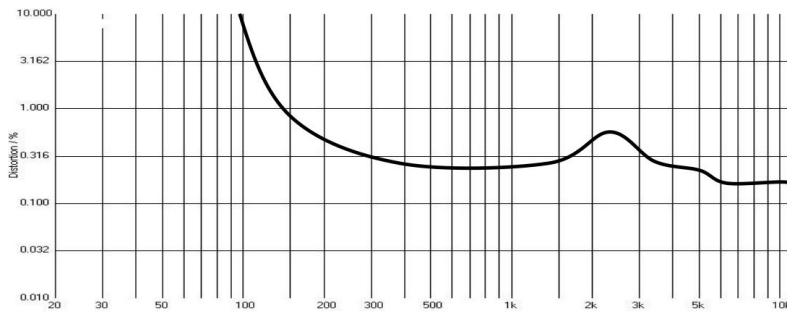

DIMENSIONS



INSTALL HOLE

