NETSYS

YOUR NETWORK GATE

RACKS

WALL MOUNTED CABINET

Product Web Page

NS-501GL6U6060

A WALL MOUNT RACK IS USED FOR RACKING AND PROTECTING NETWORK EQUIPMENT SUCH AS PATCH PANELS AND SWITCHES, BE EASY TO INSTALL.

WALL MOUNT CABINET RACK 6U 60*60

FEATURES

Single section wall mounted cabinet, front door available for many choices.

Advanced technology, precise size.

Reliable structure, static loading capacity: 60KG.

Quick and easy wall mounted, 19" standard installation.

Total welded structure.

120MM size fan could be installed at top of cabinet.

Removable side door, can fix lock. Cable entry from top and bottom.

IP Degrees: IP20.

Flexible packing methods allows for convenient stocking and end user delivery.

Multiple sizes available.

Customization requests welcome.

STANDARD AND MATERIAL

Comply with ANSI/EIA; RS-310-D; IEC297-2; DIN41491: PART1; DIN41494: PART7; GB/T3047.2-92 Standard, compatible with 19" international Standard, metric system andETSI standard

SURFACE TREATMENT

Degreasing, pickling, phosphating, powder coating.

MATERIAL

SPCC cold rolled steel.

THICKNESS

Mounting profile 1.5mm;
the others: 1.0 to 1.2mm.

COLOR

Body color: RAL9004 (black); RAL7035

RACK LAYOUT

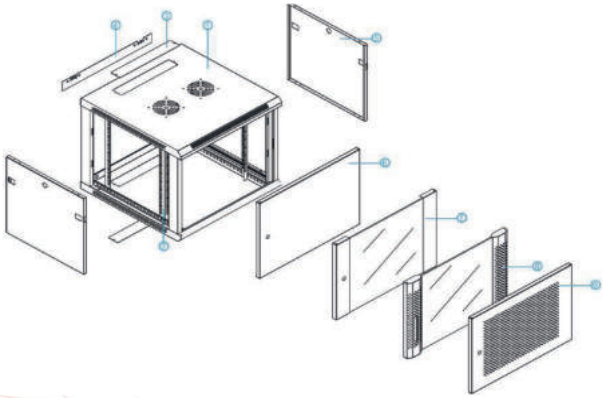

No.	Name	Qty	SPCCT (mm)
1	Frame	1 PCS	1.0
2	Mounting profile	4 PCS	1.5
3	Panel	2 PCS	1.0
4	Hanger	1 PCS	1.5
5	Side door	2 PCS	0.8
6	Metal door	1 PCS (Quantity as request)	1.0
7	Toughened glass door	1 PCS	1.2
8	Toughened glass door with round vented border	1 PCS (Quantity as request)	1.2
6	Hexagonal reticular high density vented plate door	1 PCS (Quantity as request)	1.0

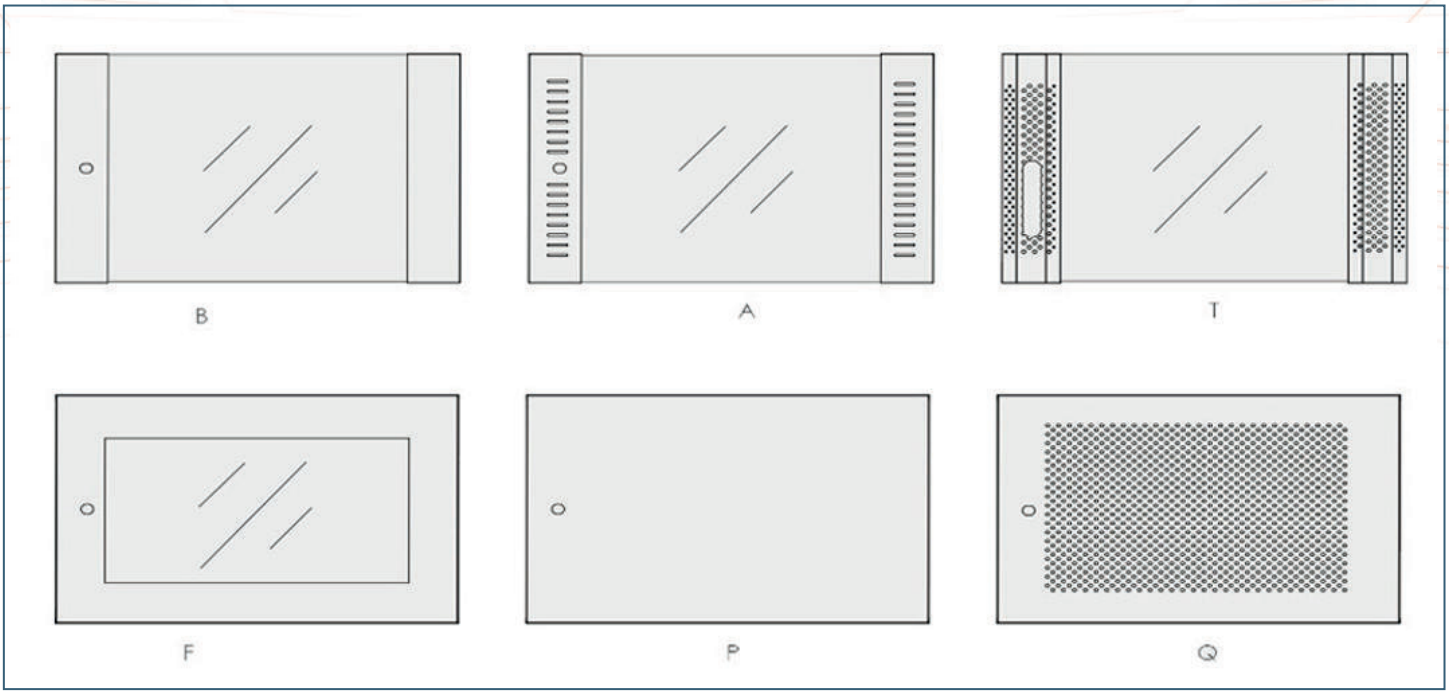

TECHNICAL SPECIFICATION

Model	U	Width	Depth	Height	Flat Packing Size Unit: M	Flat Packing CBM Unit: M
NS-501GL4U6045	4	600	450	274	0.0379	62 × 0.47 × 0.13
NS-501GL4U6060			600		0.0500	62 × 0.62 × 0.13
NS-501GL6U6045	6	600	450	363	0.0379	62 × 0.47 × 0.13
NS-501GL6U6060			600		0.0500	62 × 0.62 × 0.13
NS-501GL9U6045	9	600	450	496	0.0379	62 × 0.47 × 0.13
NS-501GL9U6060			600		0.0500	62 × 0.62 × 0.13
NS-501GL12U6045	12	600	450	629	0.0846	62 × 0.65 × 0.21
NS-501GL12U6060			600		0.0846	62 × 0.65 × 0.21
NS-501GL15U6045	15	600	450	762	0.1016	62 × 0.78 × 0.21
NS-501GL15U6060			600		0.1016	62 × 0.78 × 0.21
NS-501GL18U6045	18	600	450	895	0.1185	62 × 0.91 × 0.21
NS-501GL18U6060			600		0.1185	62 × 0.91 × 0.21

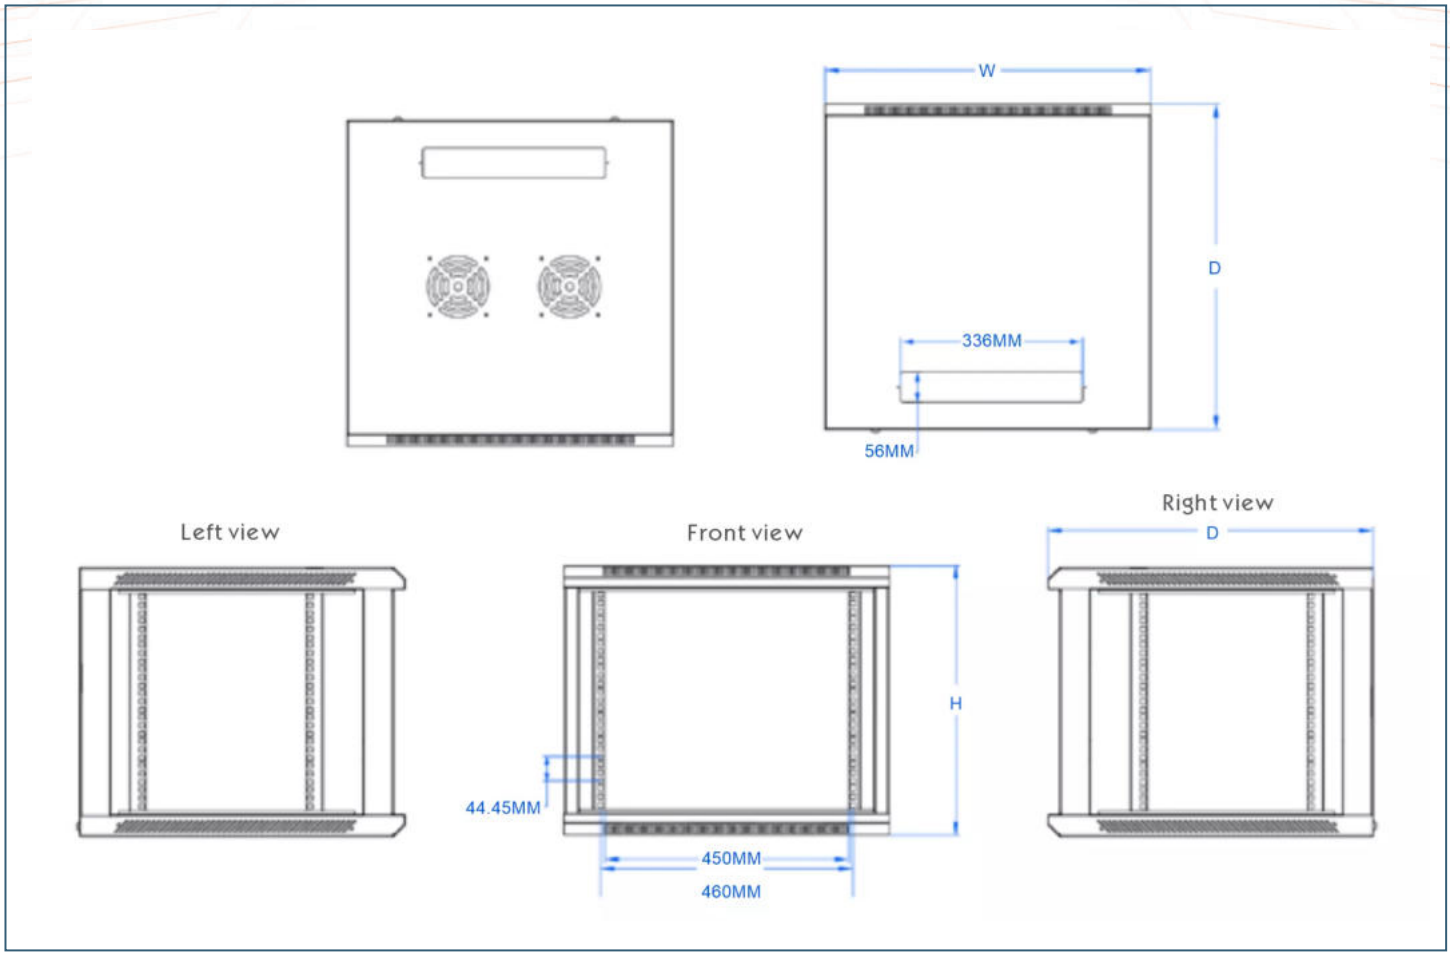

RACK INSTALLATION