

# Network Video Recorder NVR502-32E-IX-G



## Features

- Support Ultra H.265/H.265/H.264 video formats
- Support 32-channel input
- Support 2-ch HDMI, 2-ch VGA. HDMI up to 4K (3840x2160) resolution
- Support HDMI and VGA independent output
- Support up to 16 Megapixels resolution recording
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support SeekFree function: up to 16-ch with 3rd party IPC, up to 32-ch with UNV SIP/UMD IPC
- Support external USB keyboards
- Support Video Metadata, Diverse Algorithms by NVR
- Support cloud upgrade

## Specifications


Model	NVR502-32E-IX-G
<b>Decoding</b>	
Decoding Format	Ultra 265, H.265, H.264
Decoding Capability	Smart Off: H265: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8x 4K@30, 10x 6MP@30, 12x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30 H264: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8x 4K@30, 10x 6MP@30, 12x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30 Smart On: When Smart by NVR on, 16 x 1080P@30 decoding capacity will be consumed.
Decoding Capability Description	The resolution of each channel cannot exceed 4096 pixels in length or width
Audio Compression	G.711A, G.711U
<b>Network</b>	
Incoming Bandwidth	192 Mbps
Outgoing Bandwidth	192 Mbps
Max Users Can Be Added	32
Remote Users	128
Protocols	TCP/IP, P2P, SMTP, NFS, RTSP, UPnP, NTP, DHCP, PPPoE, HTTP, DNS, DDNS, SNMP, IPv6, IPv4, HTTPS
Browser (Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+
Browser (Plugin-Free)	Chrome 57+, Edge 16+, Firefox 58+, Safari 11+
<b>Video/Audio Input</b>	
IP Video Input	32-ch
RCA Audio Input	1-ch
<b>Peripheral Input</b>	
Ip Speaker	16-ch
POS	All channels
<b>Video/Audio Output</b>	
Video Output	Support 2-ch HDMI, 2-ch VGA, HDMI1 and VGA1 simultaneous output, HDMI2 and VGA2 simultaneous output, HDMI1/VGA1 and HDMI2/VGA2 independent output
HDMI Output	4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1280 × 720/60 Hz,
VGA Output	1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
HDMI Standard	HDMI1.4
RCA Audio Output	2-ch
Liveview Display	1/4/6/8/9/16/25/32
Default Num of Live Screen	32
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Playback Screen	1/4/9/16
Corridor Mode Screen of Playback	1/3
<b>Two-way Audio</b>	

Two-way Audio	1-ch, RCA (Using the audio input and output)
<b>Snapshot</b>	
FTP/Schedule/Event Snapshot	16-ch snapshot (max. 8 MP (3840 × 2160) video resolution, with 1080P snapshot resolution)
<b>Recording</b>	
Recording Resolution	32 MP/16 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF
Num of Concurrent Playback	32-ch
Synchronous Playback in Local	16-ch
<b>Smart Function</b>	
Smart by IPC	All channels (up to 16 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring, People Counting
Smart by NVR	Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Behavior Analysis, Elevator Entrance Detection, Illegally Parked Motor Vehicle, Evacuation Route Obstruction, People Counting (People Flow Counting, Crowd Density Monitoring), Video Metadata, Plate Comparison
Smart by NVR Analyzer Mode	Mixed Mode (SIP+Behavior Analysis+People Counting), Mixed Mode (Face Recognition+Mixed-Traffic Detection+AcuSearch/AcuTrack), Modes cannot active simultaneously, only one mode can active at a time.
VCA Search	Face Snapshot Search, Face Comparison Search, Behavior Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, SmartSearch+, AcuSearch, AcuTrack, SeekFree
<b>AcuSearch</b>	
Acu Search Performance	All channels with UNV SIP/UMD Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
<b>AcuTrack</b>	
Acu Track Performance	All channels with UNV SIP/UMD Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
<b>SeekFree</b>	
SeekFree Performance	All channels with UNV SIP/UMD Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
SeekFree Language	English
by NVR	All channels with UNV Face Detection Camera, Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Search by Image	Support
<b>Plate Comparison</b>	
Vehicle Number Library	Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total
<b>SIP</b>	
SIP by NVR with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Type	No Helmet Detection, No Chef Hat Detection, No Work Clothes Detection, Smoking Detection, Smoke and Fire Detection, Calling Detection, No Mask Detection, Rat Detection, Long Stay Detection, Fall Detection, Fight Detection, Absence Detection, Climbing Detection, Sleep on Duty

	Detection, People Counting, Using Mobile Phone Detection, People Gathering, People Dispersion, Quick Moving, No Reflective Clothing Detection
<b>Video Metadata</b>	
Video Metadata by NVR with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)
Video Metadata Type	Motor Vehicle: Vehicle Type, Vehicle Color, Vehicle Brand, Direction, Plate Type, Plate Color, Human Body: Gender, Age, Mask, Hairstyle, Bag Style, Direction, Upper Garment Length, Lower Garment Length, Upper Garment Color, Lower Garment Color, Non-Motor Vehicle: Non-Motor Vehicle Type, Direction, Gender, Age, Upper Garment Length, Upper Garment Color
<b>Capacity of Smart Snapshots</b>	
Capacity of Snapshot Records	2 millions records for face snapshot, 2 millions records for behavior analysis and SIP, 2 millions records for vehicle snapshot
<b>Alarm</b>	
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Audio Detection, Alarm Input
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, Array Damaged, Array Degraded
<b>Hard Disk</b>	
SATA	2 SATA Interfaces
Capacity	Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.)
Disk Group	Support
Redundant Storage	Support
<b>External Interface</b>	
Network Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface
Network Working Mode	Multi-access, load balance, network fault-tolerance
USB	Front panel: 1 × USB2.0, Rear panel: 2 × USB3.0
RS485	1
RS232	1
Alarm In	16-ch
Alarm Out	4-ch
Power Output	12 V
Buzzer	Support
Power Supply	DC 12 V/5 A
<b>Working Environment</b>	
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤25W
Heat Dissipation	Fan, Radiator
<b>Dimensions</b>	
Weight (without HDD)	1.87 KG
Height	1U

Dimensions	380mm × 322.4mm × 53mm (15.0" × 12.7" × 2.1")
<b>Certification</b>	
Certification	CE; FCC; UL; RoHS; WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B
<b>Compliance</b>	
NDA Compliant	Support
<b>GUI Language</b>	
GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
<b>Feature Supported</b>	
Downlink ONVIF	Support (Profile S)
Uplink ONVIF	N/A
NAS	Support
Ucode Basic Mode	Support
Ucode Advanced Mode	Support

## Dimensions

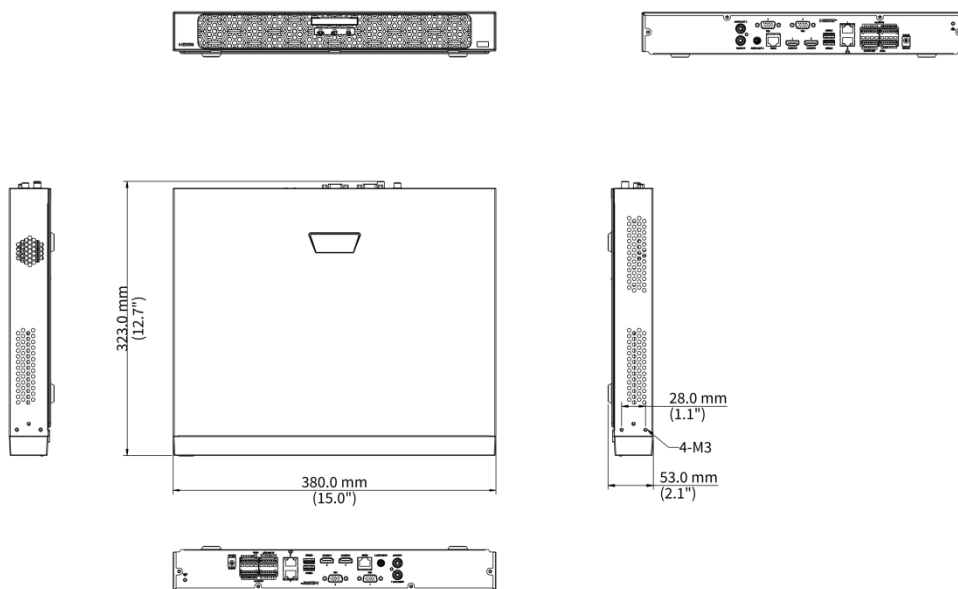

# Unlimited New View

## Zhejiang Uniview Technologies Co., Ltd.



<http://www.uniview.com>



[overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)



No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.