

## FIBER OPTIC

OUTDOOR FIBER  
OPTIC CABLE

## NS-4030M3008

OUTDOOR FIBER OPTIC CABLE IS A TYPE OF OPTICAL CABLE THAT IS SPECIFICALLY DESIGNED FOR OUTDOOR USE, IT IS TOUGH, CAN WITHSTAND WIND AND SUN EXPOSURE, AND HAS A ROBUST OUTER JACKET TO PROTECT THE CABLE

[Product Web Page](#)

## FIBER CABLE 8 CORE MULTI MODE OM3 50/125

## GYXTW

## DESCRIPTION

The bers, 250µm, are positioned in a loose tube made of a high modulus plastic.

The tubes are lled with a water-resistant Ring compound.


The tube is wrapped with a layer of PSP longitudinally.

Between the PSP and the loose tube water-blocking material is applied to keep the cable compact and watertight.

Two parallel steel wires are placed at the two sides of the steel tape.

The parallel steel wires are placed at the two sides tape.


The cable is completed with a polyethylene (PE) sheath

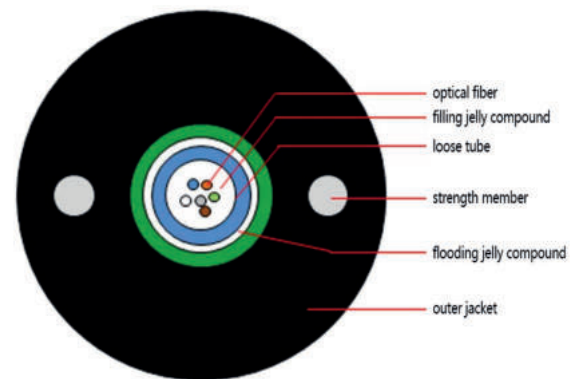

## FEATURES

- Good mechanical and temperature performance.
- High strength loose tube that is hydrolysis resistant.
- Special tube filling compound ensure a critical protection of fiber.
- Crush resistance and flexibility.
- PSP enhancing moisture-proof.
- Two parallel steel wires ensure tensile strength.
- Small diameter light weight and friendly installation.
- Long delivery length.

# TECHNICAL SPECIFICATION

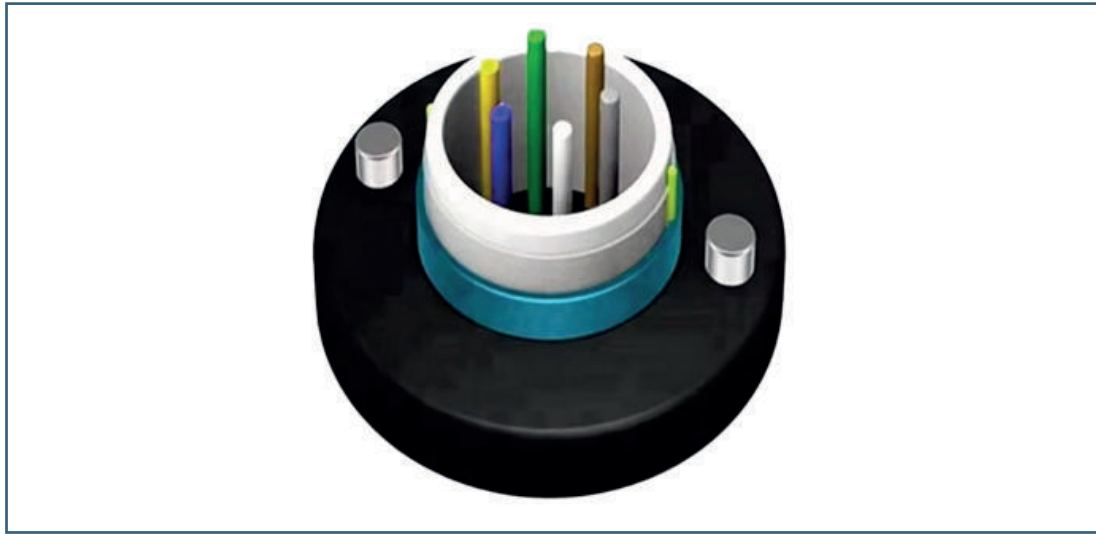

## Technical Parameters

Cable Type 2 (Increased by 2 bers)	Fiber Count	Cable Diameter (mm)	Cable Weight (kg/km)	Tensile Strength Long/Short term (N)	Crush Resistance Long/Short term (N/100mm)	Bending Radius Static/Dynamic (mm)
GYXTW-2~12	2~12	8.9	100	600/1500	300/1000	10D/20D
GYXTW-2~12	2~12	10.6	124	1000/3000	1000/3000	10D/20D
GYXTW-14~24	14~24	12.0	147	1000/3000	1000/3000	10D/20D
GYXTW-26~36	26~36	12.0	150	1000/3000	1000/3000	10D/20D
GYXTW-38~48	38~48	15.0	207	1000/3000	1000/3000	10D/20D

# TECHNICAL SPECIFICATION

## Optical Characteristics

Characteristics	Conditions	Specified values	Units	
Attenuation	1310nm	≤0.36	[dB/km]	
	1383nm(after H2-aging)	≤0.36	[dB/km]	
	1550nm	≤0.24	[dB/km]	
	1625nm	≤0.24	[dB/km]	
Attenuation vs. Wavelength Max. a difference	1285-1330nm, in reference to 1310nm	≤0.03	[dB/km]	
	1525-1575nm, in reference to 1550nm	≤0.02	[dB/km]	
Dispersion Coefficient	1285-1340nm	-3.5 to 3.5	[ps/(nm.km)]	
	1550nm	≤18	[ps/(nm.km)]	
	1625nm	≤22	[ps/(nm.km)]	
Zero Dispersion Wavelength (20)	--	1300-1324	[nm]	
Zero Dispersion Slope(So)	--	≤0.092	[ps/(um <sup>2</sup> km)]	
Typical Value	--	0.086	[ps/(nm <sup>2</sup> km)]	
PMD	Maximum Individual Fibre	--	≤0.1	[ps//km]
	Link Design Value (M=20,Q=0.01%)	--	≤0.06	[ps//km]
	Typical Value	--	0.04	[ps//km]
Cable Cutoff Wavelength (cc)	--	≤1260	[nm]	
Mode Field Diameter (MFD)	1310nm	8.7-9.5	[μm]	
	1550nm	9.8-10.8	[μm]	
Effective Group Index of Refraction (Nett)	1310nm	1.466	--	
	1550nm	1.467	--	
Point Discontinuities	1310nm	≤0.05	[dB]	
	1550nm	≤0.05	[dB]	

## Environmental Characteristics

1310nm, 1550nm & 1625nm			
Characteristics	Conditions	Specified values	Units
Temperature Dependence Induced Attenuation	-60°C to +85°C	≤0.05	[dB/km]
Temperature-Humidity Cycling Induced Attenuation	-10°C to +85°C, 98% RH	≤0.05	[dB/km]
Water Immersion Dependence Induced Attenuation	23°C, for 30 days	≤0.05	[dB/km]
Damp Heat Dependence Induced Attenuation	85°C and 85% RH, for 30 days	≤0.05	[dB/km]
Dry Heat Aging	85°C, for 30 days	≤0.05	[dB/km]

# Geometrical Characteristics

Characteristics	Conditions	Specified values	Units
Cladding Diameter	--	125 ± 0.7	[μm]
Cladding Non-Circularity	--	≤ 1	[%]
Coating Diameter	--	235-250	[μm]
Coating-Cladding Concentricity Error	--	≤12	[μm]
Coating Non-Circularity	--	≤6.0	[%]
Core-Cladding Concentricity Error	--	≤0.6	[μm]
Curl(radius)	--	≥4	[m]
Delivery Length	--	Up to 50.4	[km/reel]

# Mechanical Specifications

Characteristics		Conditions	Specified values	Units
Proof Test		--	≥9.0	[N]
		--	≥1.0	[%]
		--	≥100	[kpsi]
Macro-bend Induced Attenuation	100 Turns Around a Mandrel of 30 mm Radius	1625nm	≤0.05	[dB]
	100 Turns Around a Mandrel of 25 mm Radius	1310nm and 1550nm	≤0.05	[dB]
	1 Turn Around a Mandrel of 16 mm Radius	1550nm	≤0.05	[dB]
Coating Strip Force		typical average force	1.5	[N]
		peak force	1.3-8.9	[N]
Dynamic Fatigue Parameter(na)		--	≥20	-

Fiber color								
NO.	1	2	3	4	5	6	7	8
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black

Loose tube color												
NO.	1	2	3	4	5	6	7	8	9	10	11	12
Color	Blue	Orange	Green	Brown	Gray	White	Red	Black	Yellow	Violet	Pink	Aqua

# TECHNICAL SPECIFICATION

<b>Fiber count</b>		/	4	8	12
<b>Structure</b>		/	Uni tube		
<b>Fiber type</b>		/	G652D		
Central strength en member	<b>Material</b>	mm	Steel		
	OD (Average)		2*1.2mm		
Loose tube	<b>Material</b>	mm	PBT		
	OD (Average)		2.0±0.1		
	Thickness (Average)		0.30±0.1		
	Fiber max/tube		4	8	12
	Loose tube color		Standard color		
Extra fiber length	%	0.2~0.4			
Water blocking	<b>Material</b>	/	Flooding Compound + Water blocking tape + Steel armor tape		
Outer jacket	<b>Material</b>		HDPE		
	Thickness	mm	2.35mm		
<b>OD</b>		mm	9.0	9.0	9.0
<b>Cable weight (Average)</b>		Kg/km	75	75	75
Tension strength	Long term	N	400		
	Short term		1200		
Crush resistance	Long term	N/100mm	600		
	Short term		2000		
Bending Ridus	Static	mm	10D		
	Dynamic		20D		
Environment Temperature	Installation	°C	- 10/60		
	Operation		- 30/70		
	Storag		- 40/70		