

[Get a Quote](#)

## Overview

Hikvision DS-7204HUHI-K1 is the DS-7200HUHI-K1 series Turbo HD DVR.


### Quick Spec

Table 1 shows the quick spec.

<b>Model</b>	DS-7204HUHI-K1
<b>Video Compression</b>	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
<b>Supported camera types</b>	Support HDTVI input: 8MP, 5MP, 4MP, 3MP, 1080P/25Hz, 1080P/30Hz, 720P/25Hz, 720P/30Hz, 720P/50Hz, 720P/60Hz, Support AHD input: 5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30 Support CVI input: 4 MP, 1080p25, 1080p30, 720p25, 720p30 Support CVBS input
<b>Frame Rate</b>	Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) *: 8 MP@8 fps is only available for channel 1 of DS-7204HUHI-K1. Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
<b>Hard Disk Driver Capacity</b>	1 SATA Interface, Up to 10 TB capacity for each disk
<b>Power Supply</b>	12V DC

### Product Details

Figure 1 shows the interfaces of DS-7204HUHI-K1.

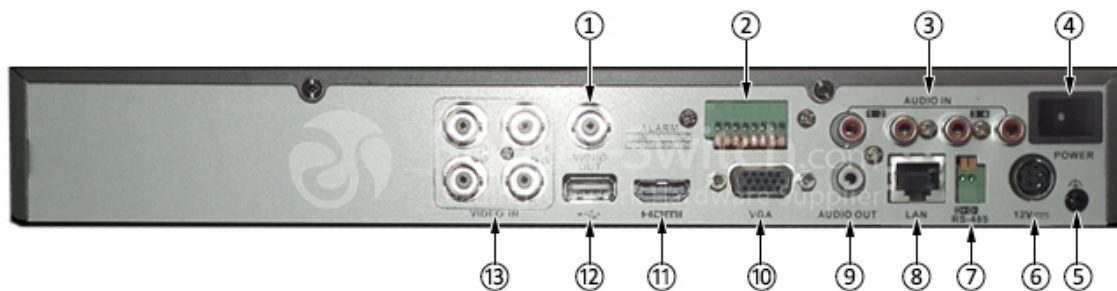

Note:

(1)	VIDEO OUT	(8)	LAN Network Interface
(2)	Alarm In/Out	(9)	AUDIO OUT, RCA Connector 1
(3)	AUDIO IN, RCA Connector 9	(10)	VGA Interface
(4)	Power Switch	(11)	HDMI Interface
(5)	GND	(12)	USB Interface

(6)	12 VDC Power Input	(13)	VIDEO IN
(7)	RS-485 Serial Interface		

## Get More Information

Do you have any question about the DS-7204HUHI-K1?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

DS-7204HUHI-K1 Specification	
<b>Video/Audio Input</b>	
Audio Input	4-ch
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Analog and HD-TVI video input	4-ch,BNC interface (1.0Vp-p, 75 Ω)connection
Supported camera types	Support HDTV1 input:8MP, 5Mp,4MP,3MP,1080P/25Hz, 1080P/30Hz,720P/25Hz, 720P/30Hz, 720P/50Hz, 720P/60Hz, Support AHD input: 5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30 Support CVI input: 4 MP, 1080p25, 1080p30, 720p25, 720p30 Support CVBS input
Video Input Interface	BNC (1.0 Vp-p, 75Ω)
Audio Compression	G.711u
Audio Input Interface	RCA (2.0 Vp-p, 1 kΩ)
Two-way Audio	1-ch, RCA (2.0 Vp-p, 1 kΩ), (using the 1st channel of audio input)
<b>Video/Audio Output</b>	
Frame Rate	Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) *: 8 MP@8 fps is only available for channel 1 of DS-7204HUHI-K1. Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video Bit Rate	32 Kbps-10 Mbps
Stream Type	Video/Video&Audio
Two-way Audio	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)
Audio Output	1-ch RCA(Linear, 1kΩ)
Audio Bit Rate	64kbps
Dual Stream	Support
Synchronous Playback	4-ch
<b>Network management</b>	
Remote connections	32
Network protocols	TCP/IP, PPPoE, DHCP, Hik-connect Cloud P2P,DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP?, HTTPS,ONVIF
<b>Hard Disk Driver</b>	

Interface Type	1 SATA Interface
Capacity	Up to 10 TB capacity for each disk
<b>External Interface</b>	
Network Interface	1; 10M / 100M self-adaptive Ethernet interface
USB Interface	2 USB 2.0 Interfaces
Serial Interface	1; standard RS-485 serial interface, half-duplex
<b>General</b>	
Power Supply	12V DC
Consumption	≤ 10W(without hard disks)
Working Temperature	-10 oC to +55 oC (14 oF to 131 oF)
Working Humidity	10% to 90%
Dimensions	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)

## Want to Buy

Order Now

Get a Quote

## Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)