

**DS-K3B411BLX  
Swing Barrier**

The DS-K3B411SX series swing barrier with 6 pairs of IR lights is designed to detect unauthorized entrance or exit. By adopting the swing barrier integratedly with the access control system, person should authenticate to pass through the lane via presenting IC or ID card, scanning QR code, etc. It is widely used in attractions, stadiums, construction sites, residences, etc.

- 6 pairs of IR light detectors: Permissions validation and anti-tailgating
- LED light indicates passing direction
- The barrier will stop working for a period of time when detecting obstruction when open/close barrier
- Self-detection, Self-diagnostics, and automatic alarm
- Door remaining open when fire alarm triggered: The barrier will open automatically when alarm is triggered.
- Barrier will automatically open when powering down

## ▪ Specification

| System                     |   |
|----------------------------|---|
| MCBF                       | > 3 million times   |
| Motor                      | Brushless motor   |
| Interface                  |   |
| Exit button                | 2   |
| Alarm input                | 1   |
| General                    |   |
| Throughput                 | 20 to 60 persons per minute<br>The actual throughput is affected by the person passing rate and passing method.   |
| Power supply method        | 100 to 240 VAC; 50 to 60 Hz   |
| IR light detectors         | 6 pairs   |
| Working temperature        | -20 °C to 65 °C (-4 °F to 149 °F)   |
| Lane width                 | 550 mm to 1100 mm   |
| Built-in access controller | No  |
| Working humidity           | 10% to 95% (no condensing)  |
| Barrier material           | Stainless steel pipe; acrylic glass   |
| Dimensions                 | Without packaging: 1200 mm × 200 mm × 1020 mm (47.2" × 7.9" × 40.2")<br>With packaging: 1408 mm × 348 mm × 1156 mm (55.4" × 13.7" × 45.5")  |
| Pedestal material          | SUS304 stainless steel  |
| Application environment    | Indoor and outdoor  |
| Protective level           | IPX4 (proved by Hikvision laboratory)   |
| Weight                     | Net (approximately): 38.3 kg (left), 43.3 kg (middle), 40.2 kg (right)/84.5 lb (left), 95.5 lb (middle), 88.6 lb (right)<br>Rough (approximately): 66.5 kg (left), 71.5 kg (middle), 68.4 kg (right)/146.6 lb (left), 157.7 lb (middle), 150.8 lb (right) |
| Approval                   | CE/CB/RoHS/REACH/WEEE   |
| Power consumption          | 65 W (stand by)   |

## ▪ Maintenance

The main element of the turnstile is stainless steel, which is rustless (antioxidant) and corrosion resistant (The anti corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically .


The instructions and tips for maintaining the turnstile are as follows:

- Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seashores and chemical plants.
- Keep the device surface clean and dry.
- Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
- Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
- Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggest to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

▪ **Available Model**

- DS-K3B411BLX-L/Pg-Dp65
- DS-K3B411BLX-L/Dp65
- DS-K3B411BLX-R/Pg-Dp65
- DS-K3B411BLX-R/Dp65
- DS-K3B411BLX-M/Pg-Dp65

▪ **Dimension**

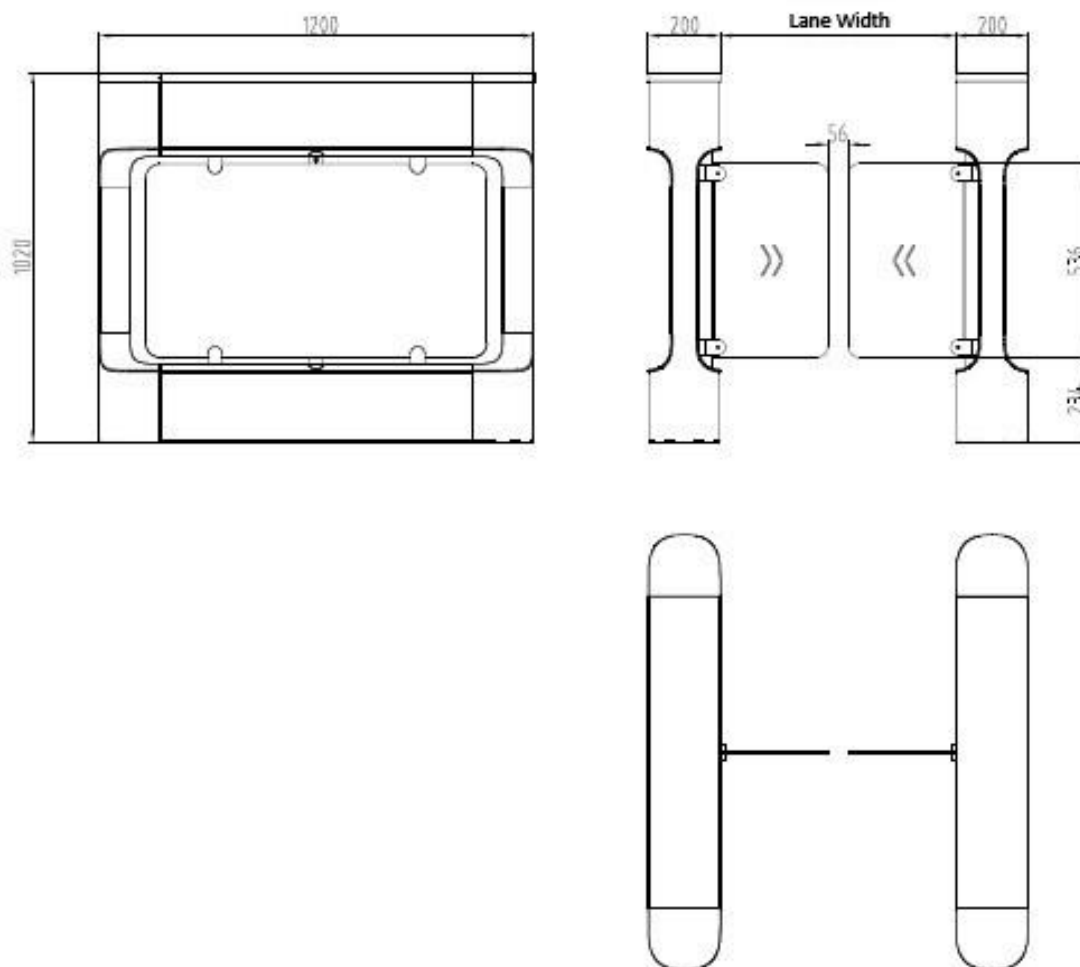

▪ **Accessory**

▪ **Included**

**DS-K1102A**



▪ **Optional**

**DS-K7R01-433**



**DS-K7R01-868**



**DS-K3B411X-BASE**



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

