

DSP501

1.5W-6W ABS Ceiling Speaker



Description

DSP501 is a ceiling speaker with built-in 70V/100V transformer. The 70V/100V transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.

The built-in 4.5" speaker driver is designed of wide frequency response 75-20,000Hz , Its made of high quality ABS material, which ensures long-term durability, and will never be out of shape or fading; Spring clip clamp makes the easy and secure installation; Driver surround excellent damping, long life, clear and sonorous sound.

Features

- 70/100V, 1.5 ~ 6W with multiple terminals
- 4.5" paper cone driver unit
- Max. Sound Pressure Level 96±2dB
- Effective Freq. Range 75Hz ~ 20kHz
- Rated power output at 3W
- High sensitivity (91±2dB)
- ABS material


Specifications

Model		DSP501
Drive Units		4.5"x 1
Rated Power		5W
Rated Voltage	70V	1.5W/3W/5W
	100V	3W/6W


Sensitivity (1m, 1W)	91±2dB
Max. SPL(1m)	96±2 dB
Frequency Response	75Hz-20kHz
Cutout Size	Φ154mm ×Φ164mm
Dimensions	80mm xΦ180mm
Net Weight	0.8kg

Product Information


Frequency Response

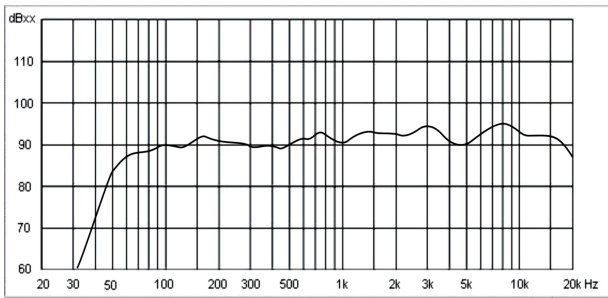

Distortion

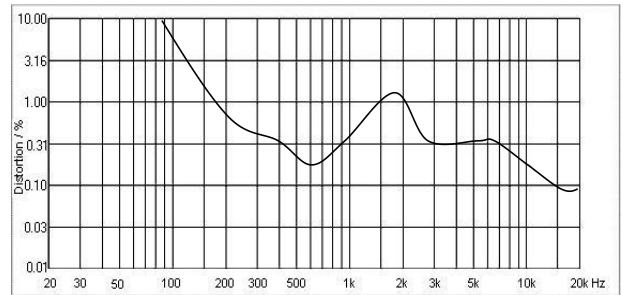

Dimensions

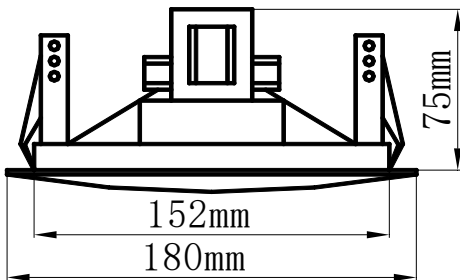

Installation Hole

